



**Dvojité spätné klapky BB
PN 6 až PN 160**

Hranice použitelnosti					
Typ	DN	PN	PMA / TMA [bar / °C]		
BB 12C	50-125	10	10 / -10	6,5 / 300	3,5 / 450
BB 14C	50-125	16	16 / -10	11 / 300	5 / 450
BB 15C	50-125	25	25 / -10	17 / 300	9 / 450
BB 16C	50-125	40	40 / -10	27 / 300	14 / 450
BB 12A	50-125	10	10 / -200	7 / 300	6 / 550
BB 14A	50-125	16	16 / -200	11 / 300	9 / 550
BB 15A	50-125	25	25 / -200	18 / 300	15 / 550
BB 16A	50-125	40	40 / -200	29 / 300	24 / 550
BB 11G/21G	150-1200	6	6 / -10	5 / 200	
BB 12G/22G	150-1200	10	10 / -10	8 / 200	
BB 14G/24G	150-1200	16	16 / -10	13 / 200	
BB 12C/22C	150-1200	10	10 / -10	7 / 300	6 / 450
BB 14C/24C	150-1200	16	16 / -10	11 / 300	10 / 450
BB 15C/25C	150-1200	25	25 / -10	18 / 300	15 / 450
BB 16C/26C	150-1200	40	40 / -10	29 / 300	25 / 400
BB 12A/22A	150-1200	10	10 / -105	7 / 300	5 / 550
BB 14A/24A	150-1200	16	16 / -105	11 / 300	8 / 550
BB 15A/25A	150-1200	25	25 / -105	17 / 300	13 / 550
BB 16A/26A	150-1200	40	40 / -105	33 / 300	25 / 550

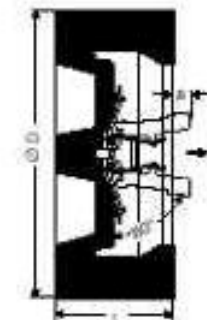

DN 100 – 125 mm

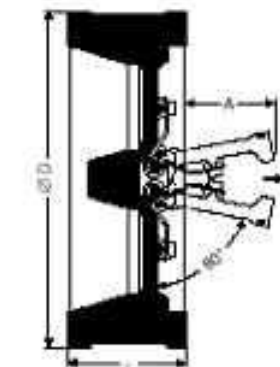

DN 150 – 1200 mm